
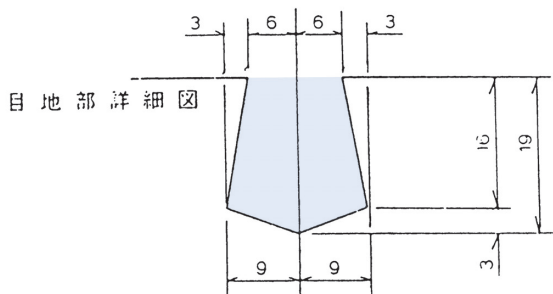
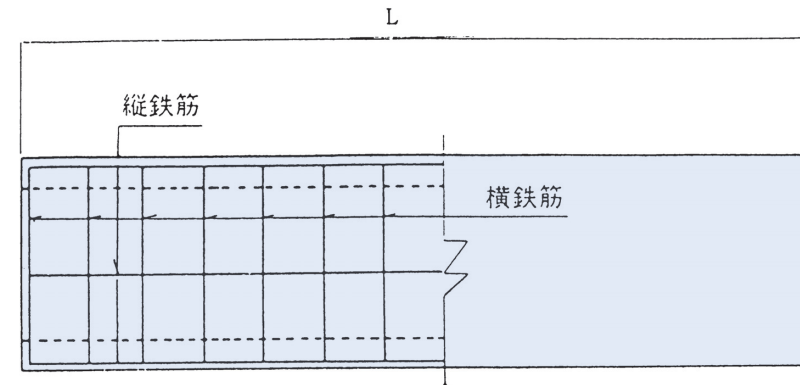


ロングU字溝U 1 2 型 (歩道用)

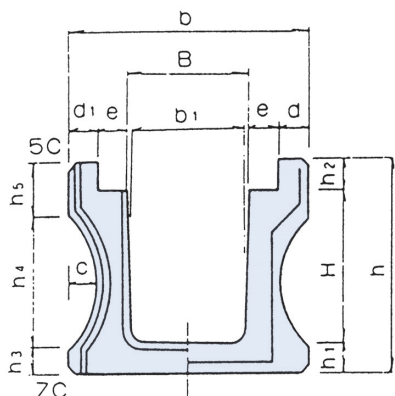

呼び名	寸 法 (mm)															鉄 筋 径 本 数		参考重量 kg	
	B	b	b ₁	H	h	h ₁	h ₂	h ₃	h ₄	h ₅	d	d ₁	e	C	L	横鉄筋	縦鉄筋		
省エネタイプ	300×300	300	540	280	300	480	80	100	50	290	140	50	50	70	60	4000	φ4×20	φ4×7	960
	300×400	300	540	280	400	580	80	100	50	390	140	50	50	70	60	4000	φ5×20	φ5×7	1120
	300×500	300	540	280	500	700	100	100	70	490	140	50	50	70	50	4000	φ5×20	φ5×7	1440
	400×400	400	640	380	400	600	100	100	70	390	140	50	50	70	60	4000	φ5×20	φ5×7	1310
	400×500	400	640	380	500	700	100	100	70	490	140	50	50	70	50	4000	φ5×20	φ5×7	1530
	500×500	500	740	480	500	720	100	120	70	490	160	50	50	70	50	4000	φ5×24	φ5×7	1640
旧タイプ	500×600	500	800	470	600	840	120	120	90	630	120	80	80	70	60	3000	φ6×15	φ5×9	1750
	300×600	300	540	270	600	820	120	100	—	—	—	50	50	70	—	4000	φ5×16	φ5×7	2196
	400×600	400	640	370	600	820	120	100	—	—	—	50	50	70	—	3000	φ5×12	φ5×7	1735
	600×600	600	900	560	600	870	150	120	—	—	—	80	80	70	—	2000	φ5×12	φ5×10	1647
	600×800	600	900	560	800	1070	150	120	—	—	—	80	80	70	—	2000	D10×6	φ6×10	1979